

03-Sleeve Labeling Machine

Sleeve labelers efficiently apply heat-shrink labels to containers, bottles, and cans across food, beverage, pharmaceutical, and cosmetic industries. Key advantages include high-speed application, consistent label placement, versatility for various container shapes and sizes, enhanced product aesthetics, and improved tamper evidence. They streamline packaging while boosting brand visibility.




Feature

- 1 : Universal Compatibility
- 2 : Robust Construction
- 3 : Tool-less Changeover
- 4 : High Precision & Speed
- 5 : Material Versatility
- 6 : User-Friendly Design

Option

- 1:Automation Integration
- 2:Quality Control Systems
- 3:Precision Driv Upgrades
- 4 : Special MaterialHandling
- 5 : Custom ToolingSolutions
- 6 : Data & Traceability

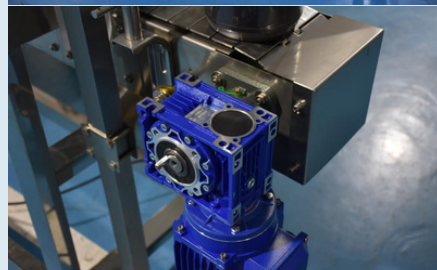

www.dzpackmachine.com . songjiang district shanghai china.

Whatsapp/phone:8615721356216

email: sales@dzpackmachine

03-Sleeve Labeling Machine

Specification for sleeve sticker

model	250TB
Equipment power (KW)	3KW
Power Supply Voltage (V)	220V (can be customized to customer request)
Set standard speed	150-300 bottles (per min)
Set standard station	One
Set standard size range	Height range 100-320mm diameter range 50-200mmBeyond this range to change a larger modelAccording to the customer's actual products customization
Tagged thickness	0.04-0.08mm
Label length	30-190mm
Applicable film material	PVC、 PET、 POS、 BOPP
Applicable bottle type	Round bottle, square, special type screen, flat type, cup type bottle.
weight of equipment	750KG
Host size	Long 2000mmX width 1300mmX 2000mm height
Body material	304 Stainless steel

www.dzpackmachine.com . songjiang district shanghai china.

Whatsapp/phone:8615721356216

email: sales@dzpackmachine

04-steam shrink tunnel

Specification for Steam contractile furnace

Item	Steam Shrink Tunnel
unit type	100Z
Fan input power and voltage	220V / 50 hz 0.7 KW (can be customized to customer request)
transporting velocity	0-35m/min
Suitable for shrinkage film thickness	0.035mm-0.13m
outline dimension	L1500 * W400 * H1500 (customized according to product size)
Transmission line width	Customize the delivery line width according to the product
Contraction furnace weight	About 100KG
Steam dosage	10-20KG/H
Body material	304 Stainless steel
manner of packing	Winding film and wooden box packaging

Application

www.dzpackmachine.com . songjiang
district shanghai china.
Whatsapp/phone:8615721356216
email: sales@dzpackmachine



04-steam shrink tunnel

Specification parameters	18W	24W	36W	48W
rated capacity	24	32	48	64
Rated steam pressure	0.4/0.7	0.4/0.7	0.4	0.4
Rated steam temperature	151/170	151/170	151	151
Water supply temperature	20	20	20	20
electric power	18KW	24KW	36KW	48KW
Power of the feed water pump motor	550	750	750	750
Safety valve caliber	DN15			
Main steam valve caliber				
Pollutant valve caliber				
The diameter of the water supply valve				
water capacity of the boiler	18	28	36	48
External size (MM)	520x420x1100	630x560x1360	600x600x1280	950x550x1400
Boiler weight	49kg	95kg	91kg	100kg

Application

www.dzpackmachine.com . songjiang district shanghai china.
 Whatsapp/phone:8615721356216
 email: sales@dzpackmachine

